

Type 2 surge protection device - VAL-MS 800/30 VF/FM - 2805402

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge arrester consisting of 2-channel base element with remote indication contact and protective plugs connected in series with a varistor and a gas-filled spark gap.

Product Features

- With or without floating remote indication contact
- Disconnect device on each individual plug
- Mechanical coding of all slots
- Type 2 consistent plug-in surge arresters
- Optical, mechanical status indication for the individual arresters



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	250.0 GRM
Custom tariff number	85363010
Country of origin	Germany

Technical data

Dimensions

Height	97 mm
Width	35.6 mm
Depth	58 mm
Horizontal pitch	2 Div.

Ambient conditions

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 80 °C

Type 2 surge protection device - VAL-MS 800/30 VF/FM - 2805402

Technical data

Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	25g
Vibration (operation)	5g

General

Standards/specifications	IEC 61643-11 2011
	EN 61643-11 2012
IEC test classification	II
	T2
EN type	T2
IEC power supply system	IT (please see note below)
Number of ports	One
SPD design	Combination type
Mode of protection	L-PEN
	L-PE
Mounting type	DIN rail: 35 mm
Color	black
Housing material	PA 6.6
	PBT
Pollution degree	2
Distance between live and grounded parts	8 mm
Inflammability class according to UL 94	V-0
Type	DIN rail module, two-section, divisible
Number of positions	2
Surge protection fault message	Optical, remote indicator contact

Additional descriptions

Note	Usable in all low-voltage systems between L-N or L-PEN. Only usable in IT Systems between L-PE, if the exposed-conductive-parts (bodies) of the equipment of the low-voltage installation is connected to the earthing arrangement of the transformer substation. (interconnected earthing arrangement of the HV-transformer substation with the bodies of the LV-installation. $R_E = R_A$ accordance to IEC 60364-4-442 / VDE 0100-442 Fig. 44D / Example a)
------	---

Protective circuit

Nominal voltage U_N	400/690 V AC (TN-C)
	690 V AC (IT)
Nominal frequency f_N	50 Hz (60 Hz)

Type 2 surge protection device - VAL-MS 800/30 VF/FM - 2805402

Technical data

Protective circuit

Maximum continuous operating voltage U_C (L-PE)	800 V AC
Maximum continuous operating voltage U_C (L-PEN)	800 V AC
Rated load current I_L	80 A
Residual current I_{PE}	$\leq 3 \mu\text{A}$
Standby power consumption P_C	$\leq 3 \text{ mVA}$
Nominal discharge current I_n (8/20) μs (L-PE)	15 kA
Nominal discharge current I_n (8/20) μs (L-PEN)	15 kA
Maximum discharge current I_{max} (8/20) μs (L-PE)	30 kA
Maximum discharge current I_{max} (8/20) μs (L-PEN)	30 kA
Short-circuit current rating I_{SCCR}	25 kA
Voltage protection level U_p (L-PE)	$\leq 5 \text{ kV}$
Voltage protection level U_p (L-PEN)	$\leq 5 \text{ kV}$
Residual voltage U_{res} (L-PE)	$\leq 3 \text{ kV}$ (at I_n)
	$\leq 2.6 \text{ kV}$ (at 10 kA)
	$\leq 2.4 \text{ kV}$ (at 5 kA)
	$\leq 2.3 \text{ kV}$ (at 3 kA)
Residual voltage U_{res} (L-PEN)	$\leq 3 \text{ kV}$ (at I_n)
	$\leq 2.6 \text{ kV}$ (at 10 kA)
	$\leq 2.4 \text{ kV}$ (at 5 kA)
	$\leq 2.3 \text{ kV}$ (at 3 kA)
Front of wave sparkover voltage at 6 kV (1.2/50) μs (L-PE)	$\leq 5 \text{ kV}$
Front of wave sparkover voltage at 6 kV (1.2/50) μs (L-PEN)	$\leq 5 \text{ kV}$
TOV behavior at U_T (L-PEN)	1550 V AC (5 s / withstand mode)
Response time t_A (L-PE)	$\leq 100 \text{ ns}$
Response time t_A (L-PEN)	$\leq 100 \text{ ns}$
Max. backup fuse with branch wiring	100 A AC (gG)
Max. backup fuse with V-type through wiring	80 A AC (gG)

Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	PDT contact
Operating voltage	5 V AC ... 250 V AC
	30 V DC
Operating current	5 mA AC ... 1.5 A AC
	1 A DC
Connection method	Screw connection
Screw thread	M2

Type 2 surge protection device - VAL-MS 800/30 VF/FM - 2805402

Technical data

Indicator/remote signaling

Tightening torque	0.25 Nm
Stripping length	7 mm
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
AWG conductor cross section	28 ... 16

Connection data

Connection method	Screw connection
Conductor cross section stranded min.	1.5 mm ²
Conductor cross section stranded max.	25 mm ²
Conductor cross section solid min.	1.5 mm ²
Conductor cross section solid max.	35 mm ²
AWG conductor cross section	15 ... 2
Screw thread	M5
Tightening torque	4.5 Nm
Stripping length	16 mm

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130805
eCl@ss 7.0	27130805
eCl@ss 8.0	27130805

ETIM

ETIM 2.0	EC000941
ETIM 3.0	EC000941
ETIM 4.0	EC000941
ETIM 5.0	EC000941

UNSPSC

UNSPSC 6.01	30212010
-------------	----------

Type 2 surge protection device - VAL-MS 800/30 VF/FM - 2805402

Classifications

UNSPSC

UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals






Approvals

KEMA-KEUR / ÖVE / GL / CCA / IEC EE CB Scheme / KEMA-KEUR / ÖVE

Ex Approvals

Approvals submitted

Approval details




Type 2 surge protection device - VAL-MS 800/30 VF/FM - 2805402

Approvals



Drawings

Dimensioned drawing

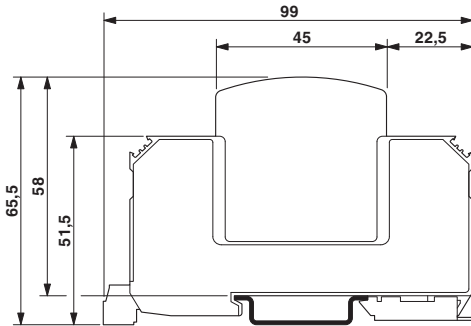

Circuit diagram

